

LS-DDNC

Low Space Direct Driven systems

- Lightest and smallest direct driven system.
- Complete assembled package (plug-in system).
- Could be partly fitted behind fuel tank (Maximum space required 330 mm)

B 600

250 - 600 m³/h

MISTRAL

365 - 750 m³/h

TYPHON II

500 - 1130 m³/h

B 600 20R LS-DDNC



Low Space Direct Driven Non Cooled system

Length : 311 mm - Height : 790 mm
Width : 717 mm

TYPHON II 13R/15L LS-DDNC



Low Space Direct Driven Non Cooled system


Length : 311 mm - Height : 790 mm
Width : 717 mm

LS-Direct Driven Non Cooled system

Compressor type			B 600		MISTRAL		TYPHON II	
Compressor version			20R	13R/15L	20R	13R/15L	20R	13R/15L
			30R	19R/22L	30R	19R/22L	30R	19R/22L
Flow		m ³ /h	250 - 600		365 - 750		500 - 1130	
Weight	-	kg	150	180	153	183	198	228
Height	H	mm	max. 790					
Length	L	mm	311					
Width	W	mm	717					
Compressor Length	C	mm	549	686	587	723	664	799




20R/CW 1600 - 2000 rpm
30R/CW 2400 - 3000 rpm

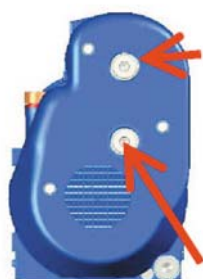

13R/CW 1040 - 1300 rpm
19R/CW 1560 - 1950 rpm

15L/CCW 1200 - 1500 rpm
22L/CCW 1800 - 2250 rpm

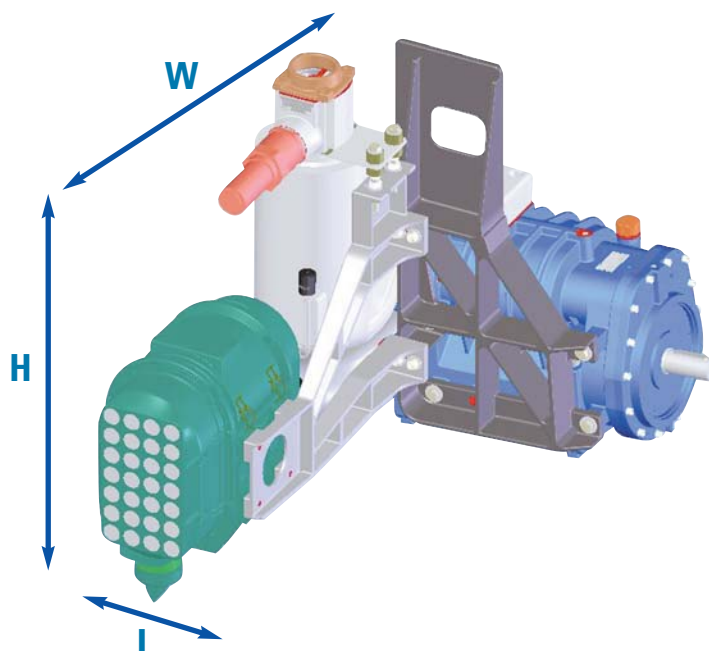

Blackmer
A DOVER COMPANY
www.blackmer.com

BLACKMER
MEMBER OF
PSG
PUMP SOLUTIONS GROUP
A DOVER COMPANY

World Headquarters

1809 Century Avenue SW • Grand Rapids, MI 49503-1530 USA • T 616.241.1611 F 616.241.3752

European Headquarters

ZI la Plaine des Isles, rue des Caillottes 89000 Auxerre, FRANCE • T +33.3.86.49.86.30 F +33.3.86.46.42.10
contact@blackmer-movex.com

Distributed by :



Blackmer se reserva el derecho de modificar sin aviso previo las informaciones y presentaciones contenidas en este documento. Documento no contractual.
Printed in FRANCE by Filigrane

© 2005 Blackmer